DEAERATOR --- PHYSICAL DATA SHEET

FROM 200 000 PPH TO 350 000 PPH / DEAERATOR

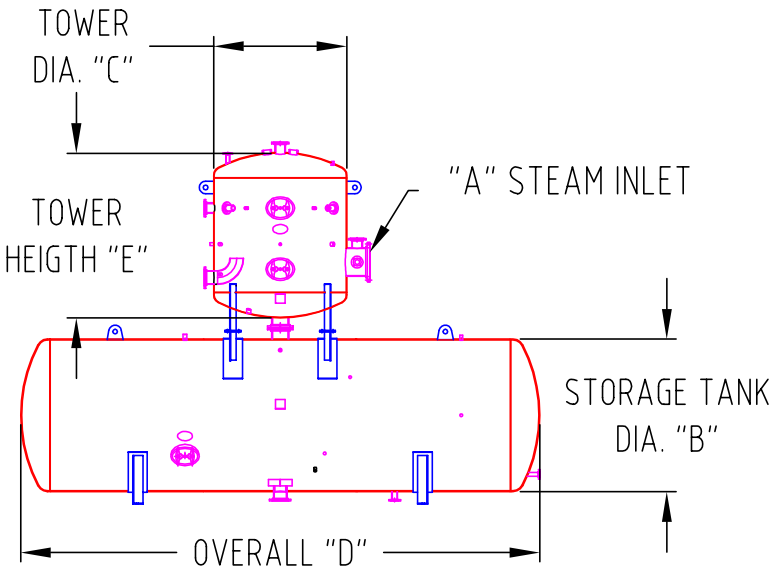

FROM 200 000 TO 350 000 PPH

PERCENTAGE OF CONDENSATE: 50%
CONDENSATE TEMPERATURE: 180°F
MAKE UP WATER TEMPERATURE: 50°F
STORAGE CAPACITY: 10 MINUTES

This information is subject to changes without notice

DEAERATOR MODEL : / DG (PPH)		*200 000*	*250 000*	*300 000*	*350 000*	
STEAM INLET	*A*	*18"*	*20"*	*22"*	*24"*	
STORAGE TANK DIA.	*B*	*84"*	*102"*	*108"*	*108"*	
TOWER OUTSIDE DIA.	*C*	*66"*	*78"*	*84"*	*84"*	
STORAGE TANK LENGTH	*D*	*240"*	*178.625"*	*190.25"*	*215.25"*	
TOWER HEIGTH	*E*	*78.5"*	*94.375"*	*100"*	*102"*	

GREATER DESIGNS AVAILABLE UPON REQUEST

LE GROUPE SIMONEAU INC

THERMODESIGN INC.
1541 de Coulomb,Boucherville, Qc, Canada, J4B 8C5
TEL: 450-641-4204 FAX: 450-641-4211 info@thermodesigninc.com

DOC. NO: FROM200TO350
05/12/05 REV.A